
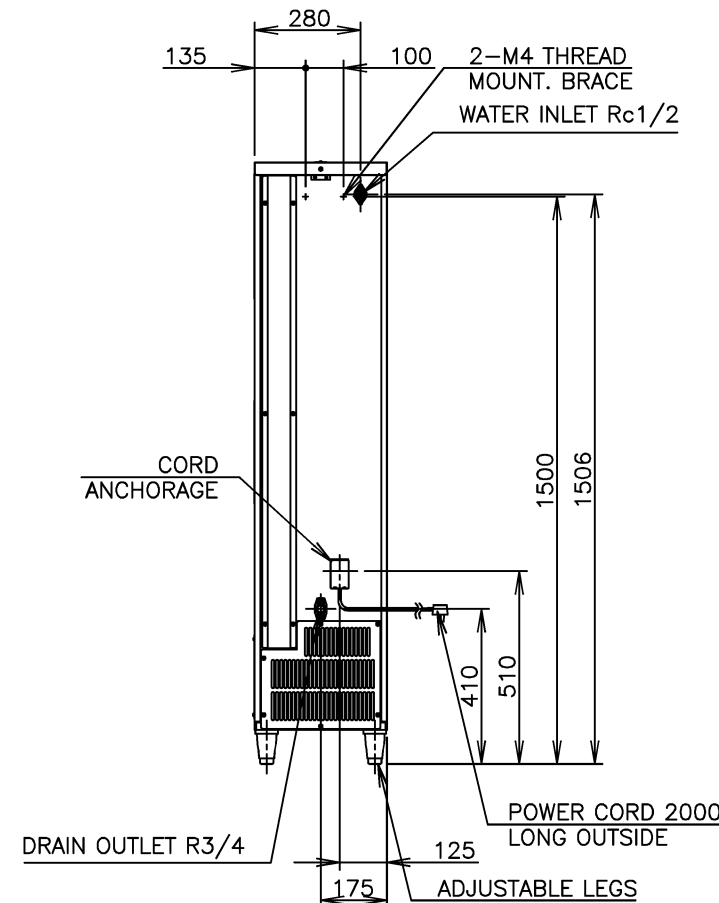


OPERATING CONDITIONS	Ambient Temp.: 1 - 40° C, Water Supply Pressure: 5 - 35C'
	Water Supply Pressure: 0.07 - 0.78MPa (0.7 - 7.8bar)
	Voltage Range: Rated Voltage $\pm 6/10\%$

- \*We reserve the right to make changes in specifications and design without prior notice.
1. Install the ice maker properly in accordance with the instructions on location, water supply/drain connections and electrical connections stated in the instruction manual provided. Allow 10mm extra space at the installation site to meet any installation requirements (additional spacing is also required for proper air flow and pipe connections).
  2. The ice production depends on the ambient and water temperatures. Refer to the instruction manual.
  3. The adjustable legs are optional. Consult with our sales staff.
  4. Product code: E2HA-D010

ITEM	Hoshizaki Cube Ice Dispenser	
MODEL	DIM-30DE-2	
POWER SUPPLY	1 Phase 220-240/230V 50/60Hz Capacity: 0.6kVA (2.1A)/0.58kVA (2.0A)	
AMPERAGE	Running: 2.1/1.8A Rated Motor: 2.1/1.8A Starting: 13/13A	
ELECTRIC CONSUMPTION	Rated Motor:320/340W (Power factor:63/79%)	
ICE PRODUCTION PER 24h	Approx.40/42kg (Ambient Temp.10° C,Water Temp.10° C) Approx.36/36kg (Ambient Temp.21° C,Water Temp.15° C) Approx.28/30kg (Ambient Temp.32° C,Water Temp.21° C)	
SHAPE OF ICE	Cube Approx. 28x28x32mm	
ICE PRODUCTION PER CYCLE	Approx. 0.61kg/27 pcs. (Ambient Temp.32° C,Water Temp.21° C)	
MAX. STORAGE CAPACITY	Approx. 15kg	
WATER CONSUMPTION PER 24h	Approx.0.15/0.17m <sup>3</sup> (Ambient Temp.10° C,Water Temp.10° C) Approx.0.10/0.11m <sup>3</sup> (Ambient Temp.21° C,Water Temp.15° C) Approx.0.08/0.09m <sup>3</sup> (Ambient Temp.32° C,Water Temp.21° C)	
ICE RELEASE CAPACITY	Approx. 1700g/min	
OUTSIDE DIMENSIONS	350mm(W) x 526mm(D) x 1590(-1635) mm(H)	
HEAT REJECTION	600/630W (520/540kcal/h) (AT.32° C,WT.21° C)	
CABINET	Plastic (Delivery Stage,Louver) Colored Steel (Top,Side) Galvanized Steel (Rear) Acrylic Painted Steel (Front)	
STORAGE BIN	ABS Plastic, Insulation: Polyurethane Foam	
ICE MAKING SYSTEM	Cell Type	
HARVESTING SYSTEM	Hot Gas Defrost	
ICE DISPENSING SYSTEM	Auger Operated By Push Switch	
CONNECTIONS - ELECTRIC	X-type Con. (with CONT./UK Plug)	
CONNECTIONS - WATER SUPPLY	Inlet Rc1/2 (rear side)	
CONNECTIONS-DRAIN	Outlet R3/4 (rear side)	
COMPRESSOR	Hermetic	
CONDENSER	Fin and Tube Type, Air-cooled	
EVAPORATOR	Electroless nickel plated Copper Tube on Sheet	
REFRIGERANT CONTROL	Capillary Tube	
REFRIGERANT	R134a/200g	
ICE MAKING CONTROL	Thermistor, Timer	
HARVESTING CONTROL	Thermistor	
ICE MAKING WATER CONTROL	Timer, Water Pan's movement	
BIN CONTROL	Microswitch With Time Delay	
ELECTRICAL PROTECTION	Class I Appliance, 5A Fuse	
COMPRESSOR PROTECTION	Auto-reset Overload Protector	
ADJUSTABLE LEGS	ABS (90-135mm)	
NET WEIGHT	65kg (Gross Weight 80kg)	
PACKAGE	450(W) x 730(D) x 1666(H) mm	
ACCESSORIES	Mounting Brace (Wall Mounting), Installation Kit	
OPTIONAL PARTS	Mounting Brace (Floor Mounting)	

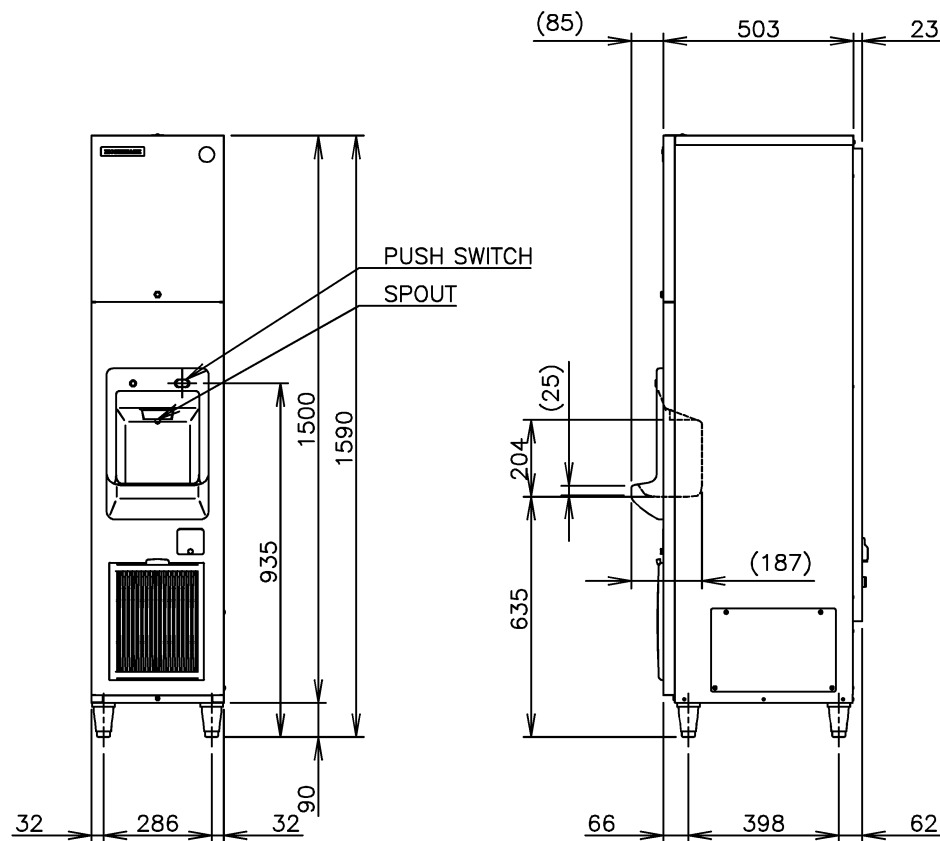

# HOSHIZAKI CUBE ICE DISPENSER DIM-30DE-2 [Cell Type]

APPROVED YAMASAKI	CHECKED OSAKA	DESIGNED ISHITOMI	DRAWN WATANABE	SCALE 1/20	TRIGONOMETRY
YAMASAKI	UEDA	2018.04.27	DATE 2016.11.22	DRAWING NO. D19019	SYMBOL 3
APPROVED	DESIGNED	DATE			